



MAN LIFT

EXPLOSION
PROOF **EX**



3268EX EXPLOSION PROOF SCISSOR LIFT

SPECIFICATIONS

Working Height	38 ft	11.6 m
Raised Platform Height	32 ft	9.8 m
Lowered Platform Height	54 in	1.37 m
Platform Size (inside)	56 × 96 in	1.4 × 2.44 m
Capacity (Overall)	1,000 lbs	454 kg
Overall Width	69.5 in	1.76 m
Overall Length	107 in	2.72 m
Stowed Height (Rails Up)	99 in	2.51 m
Stowed Height (Rails Down)	69 in	1.75 m
Deck Extension	5 ft	1.52 m
Ground Clearance	8 in	0.20 m
Maximum Drive Height	Full Height	
Wheelbase	80.5 in	2.04 m
Inside Turning Radius	60 in	1.52 m
Outside Turning Radius	156 in	3.96 m
Drive Speed (Stowed)	3.8 mph	6.1 km/h
Drive Speed (Raised)	0.4 mph	0.6 km/h
Gross Weight	9,600 lbs	4,354 kg
Batteries	8 × 6V 420 Amp-hr	
Charger	20 Amp Automatic SCR	

Specifications subject to change

S

SAFETY

- Explosion Proof
- Factory Mutual Approved
- Class 1, Division 1, Group D
- Fully Compliant with the Latest UL 583 Type EX Standard
- ANSI A92.20 & CSA B354.6 Compliant

E

STANDARD EQUIPMENT


- 32 ft Platform Height
- 38 ft Working Height
- 56 × 96 in Platform Size
- 8 in Ground Clearance
- 1,000 lb Capacity
- 5 ft Extendable Deck
- Proportional Drive Controls
- Battery Condition Indicator
- 250 Amp Hr Battery
- Full Height Swing Gate
- Movement Alarm

O

OPTIONAL

- Padded Aircraft Rails
- Enhanced Padded Aircraft Rails
- 1/2" Airline to Platform
- Fall Arrest System
- Drive / Lift-Lower Disable w/ Deck Extended
- Additional Battery Set w/ Removable Tray
- Extension Gate w/ Fall Arrest System
- Scissor Stack Bellow
- EX Rated LED Task Lighting

MADE IN THE
USA 

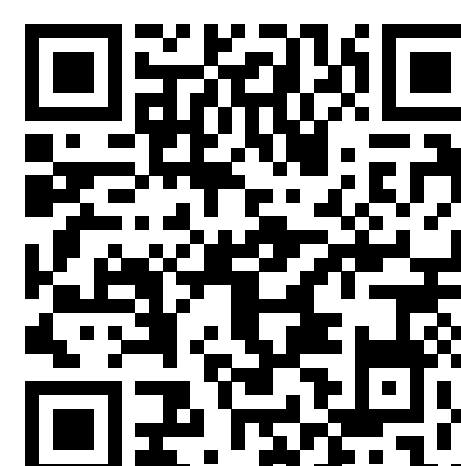

Manufacturer of Custom
Aerial Lifts

manliftusa.com

sales@manliftusa.com